GigolA®

ENG

DESTRATIFICATION FANS

For breeding farms, greenhouses and industrial applications

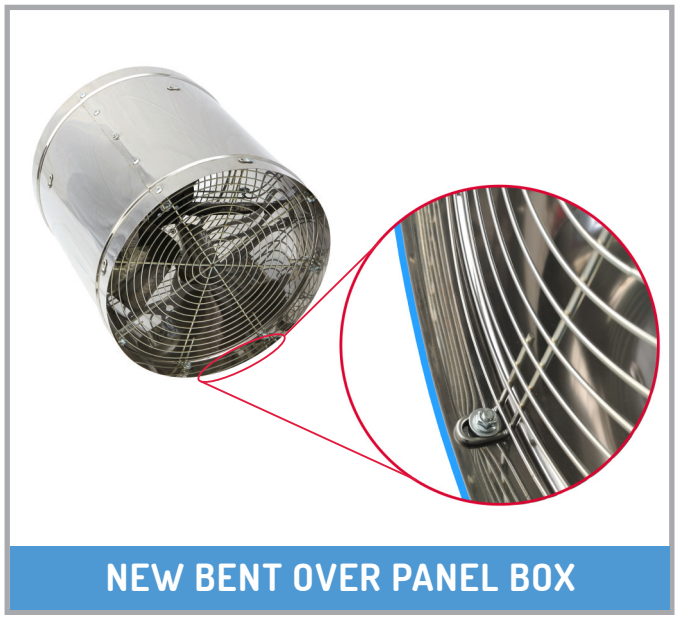

NEW BENT OVER PANEL BOX

The new bent over panel box provide the safety handling of the fan without getting injured. Our destratification fan is available with stainless steel case and blades, or with galvanized iron case and blades (upon request).

TECHNICAL FEATURES								
TYPE	Airflow (m^3/h)	Speed (rpm)	Diameter Ø (mm)	Power (hp)	Power (kW)	Voltage (V)	No. of Phases	Weight (kg)
ES 470	6800	960	470	0,33	0,25	230/400	1 or 3	14

The fan resists humidity, heat and cold (as better clarified in the use and maintenance manual). It has been designed specifically to operate in highly corrosive environments or in environments with abrasive substances. The fan shall only be used for the purpose for which it is designed and in compliance with the law. The user has the responsibility to require an adequate motor to be in compliance with local legislations. Standard shutter wall fans are equipped with one protection grid only. Local legislations may require an additional safety grid for the shutter. This may be connected to the height of the installation. The customer is responsible to check compliance with local legislations and require an appropriate grid, if needed. Please refer to the use and maintenance manual for any further clarification.

GIGOLA E RICCARDI S.p.A.

FANS
VENTILATORI
Headquarter and fan production plant
Sede legale e produzione ventilatori
25046 Cazzago San Martino (BS) ITALY
Via Alessandro Volta, 7
Tel. 0039 030 725368
Fax 0039 030 7255438

COOLING PAD SYSTEM
PANNELLO EVAPORATIVO COOLING
Pad production plant
Produzione pannelli evaporativi
25030 Erbusco (BS) ITALY
Via dell'Industria, 41
Tel. 0039 030 7242316
Fax 0039 030 7248406

info@gigolariccardi.it - www.gigolariccardi.it

CE

MADE IN ITALY

GigolA® V2.0

ITA

DESTRATIFICATORE

Per allevamenti, serre ed applicazioni industriali

Il ventilatore destratificatore è disponibile con cassa e pale in acciaio inox, oppure con cassa e pale in lamera zincata.

CARATTERISTICHE TECNICHE								
MODELLO	Portata (m^3/h)	Velocità (rpm)	Diametro Ø (mm)	Potenza (hp)	Potenza (kW)	Voltaggio (V)	Nr Fasi	Peso (kg)
ES 470	6800	960	470	0,33	0,25	230/400	1 o 3	14

Il ventilatore è resistente all'umidità, al calore ed al freddo (come meglio specificato nel manuale di uso e manutenzione) ed è stato progettato specificatamente per funzionare in ambienti altamente corrosivi o con sostanze abrasive. Pertanto, il ventilatore verrà utilizzato solo per gli scopi per i quali è stato progettato ed in conformità alla normativa vigente. Il cliente ha la responsabilità di richiedere un motore adeguato, in conformità alle leggi locali vigenti. I ventilatori standard dotati di serranda sono equipaggiati con una sola rete di protezione. Le normative locali possono richiedere reti addizionali per le serrande. Ciò può essere connesso all'altezza a cui il ventilatore viene installato. Il cliente è responsabile della verifica della rispondenza alle normative e deve richiedere una griglia di protezione appropriata, se necessario. L'utilizzatore si assume la piena responsabilità di un utilizzo non conforme. Si prega di consultare il manuale di uso e manutenzione per qualsiasi chiarimento.

GIGOLA E RICCARDI S.p.A.

FANS
VENTILATORI
Headquarter and fan production plant
Sede legale e produzione ventilatori
25046 Cazzago San Martino (BS) ITALY
Via Alessandro Volta, 7
Tel. 0039 030 725368
Fax 0039 030 7255438

COOLING PAD SYSTEM
PANNELLO EVAPORATIVO COOLING
Pad production plant
Produzione pannelli evaporativi
25030 Erbusco (BS) ITALY
Via dell'Industria, 41
Tel. 0039 030 7242316
Fax 0039 030 7248406

info@gigolariccardi.it - www.gigolariccardi.it

MADE IN ITALY

CE

GigolA® V2.0